
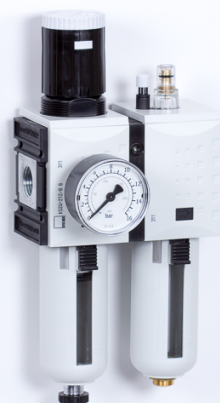


KS2U-212/8 G HA

HAFNER


(HU) Levegő-előkészítő egység - 8 bar - 5 mikron + Manométer (FS-2)

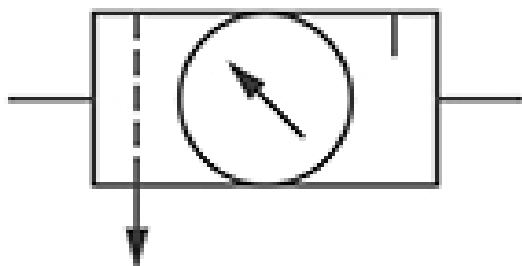

Technical data

Port size / Connection	G 1/2"
Medium	Compressed air
Temperature range	-10°C...+50°C
Air flow rate (P1=6 bar, ΔP=1 bar)	3500 l/min
Material diaphragm	NBR
Oil metering	10-20 drops/min
Material bowl	Polyamide
Regulating range	0...8 bar
Outlet operating pressure	8 bar
Condensate drain	Semi-automatic drain
Material body	Plastic
Material bowl	Polycarbonate
Material seals	NBR
Unit width	63 mm
Size / Series	2
Inlet operating pressure	16 bar
Filter fineness	5 micron
Material body	Polyamide

KS2U-212/8 G HA



HAFNER

(HU) Levegő-előkészítő egység - 8 bar - 5 mikron + Manométer (FS-2)

