
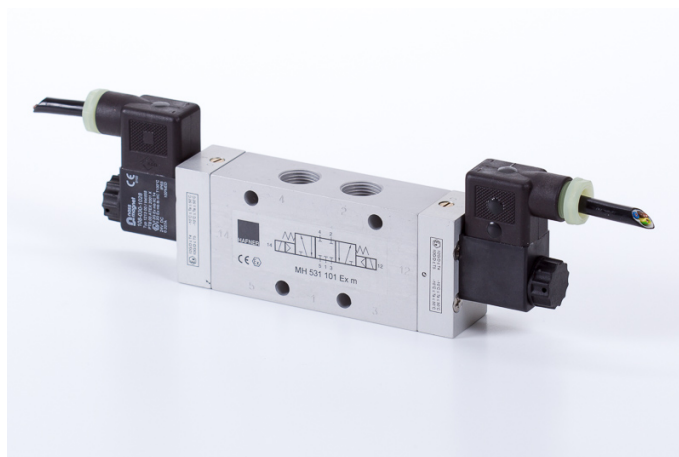


MH 532 101 EX M

HAFNER


MH 532 101 EX M

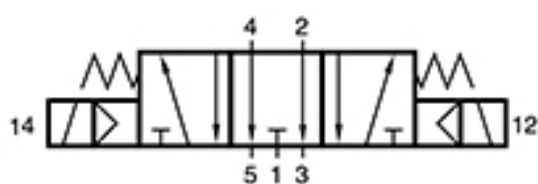

Technical data

Port size / Connection	G 3/8"
Medium	Compressed air
Function	3-position, centre exhausted
Temperature range	-10°C...+50°C
Port orientation	On two sides
Operating pressure	1,5...10 bar
Air flow rate (P1=6 bar, ΔP=1 bar)	2250 l/min
Ignition protection type	Ex m
Mounting type	In-line
Power consumption	3 W / 5 VA
ATEX zone	II 2 G Ex h IIC T6 Gb -10°C ≤ Ta ≤ +50°C II 2 D Ex h IIIC
Ways	5/3-ways
Material body	Aluminum
Switching time	50 ms 6 bar, +20°C
Actuation	Electrically actuated

MH 532 101 EX M

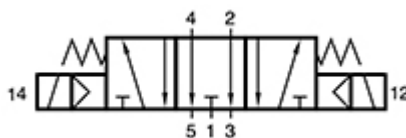

HAFNER

MH 532 101 EX M

