


REM 16/50

HAFNER


(HU) ISO 6432 körprofil henger

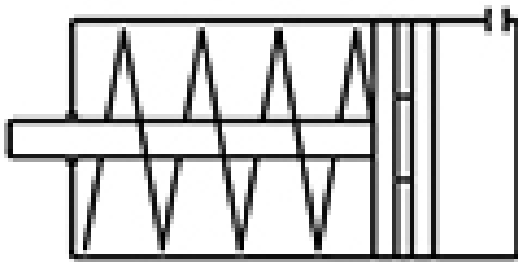

Technical data


Port size / Connection	M5
Piston rod thread	M6 - male thread
ISO standard	ISO 6432
Medium	Compressed air
Piston type	Magnetic
Material seals	Polyurethane, NBR
Material heads	Anodized aluminum
Diameter	Ø16
Function	Single acting
Temperature range	-20°C...+80°C
Material body	Stainless steel
Material piston	Brass
Piston rod position	Spring pushes piston rod in without pressure
Material guide bushing	Sintered bronze
Piston rod diameter	Ø6 mm
Stroke	50 mm
Operating pressure	1...10 bar
Thrust force	105 N
Cushioning	Built-in cushioning rings
Material piston rod	Stainless steel (AISI 304)

REM 16/50



HAFNER

(HU) ISO 6432 körprofil henger

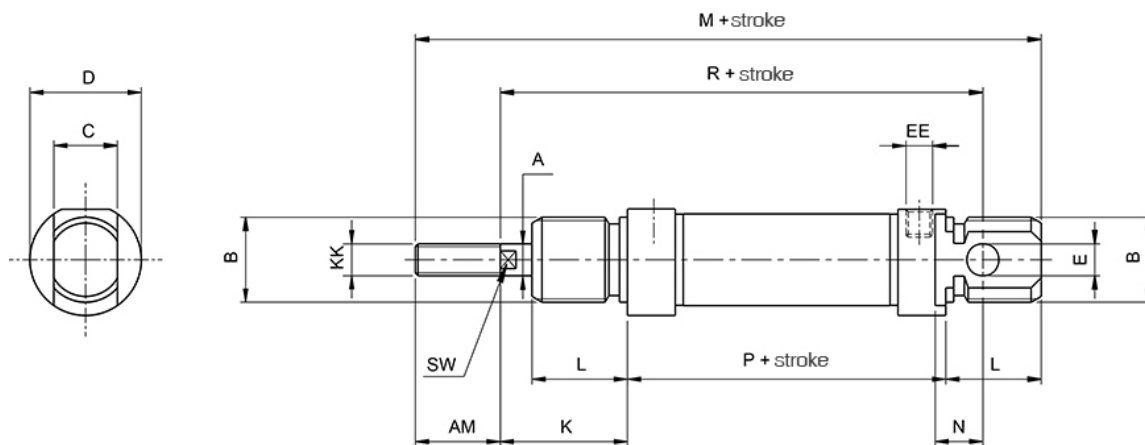

Type number	Ø [mm]	A	B	C	D	E	K	L	M	N	P	R	AM	EE	KK	SW
REM 8/...	Ø 8	4	M 12 x 1,25	8	16	4	16	12	86	6	46	64	12	M 5	M 4	-
REM 10/...	Ø 10	4	M 12 x 1,25	8	16	4	16	12	86	6	46	64	12	M 5	M 4	-
REM 12/...	Ø 12	6	M 16 x 1,5	12	19	6	22	18	104	9	48	75	16	M 5	M 6	5
REM 16/...	Ø 16	6	M 16 x 1,5	12	19	6	22	18	109	9	53	82	16	M 5	M 6	5
REM 20/...	Ø 20	8	M 22 x 1,5	16	27	8	24	20	131	12	67	95	20	G 1/8"	M 8	7
REM 25/...	Ø 25	10	M 22 x 1,5	16	30	8	28	22	140	12	68	104	22	G 1/8"	M 10 x 1,25	9