


REMV 25/10

HAFNER

(HU) ISO 6432 körprofil henger

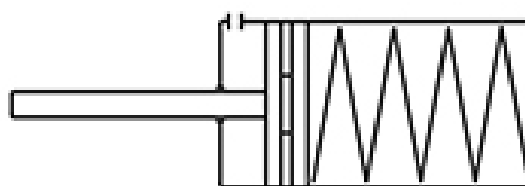

Technical data


Port size / Connection	G 1/8"
Piston rod thread	M10 x 1,25 - male thread
ISO standard	ISO 6432
Medium	Compressed air
Traction force	235 N
Piston type	Magnetic
Material seals	Polyurethane, NBR
Material heads	Anodized aluminum
Diameter	Ø25
Function	Single acting
Temperature range	-20°C...+80°C
Material body	Stainless steel
Material piston	Brass
Piston rod position	Spring pushes piston rod out without pressure
Material guide bushing	Sintered bronze
Piston rod diameter	Ø10 mm
Stroke	10 mm
Operating pressure	1...10 bar
Cushioning	Built-in cushioning rings
Material piston rod	Stainless steel (AISI 304)

REMV 25/10



HAFNER

(HU) ISO 6432 körprofil henger

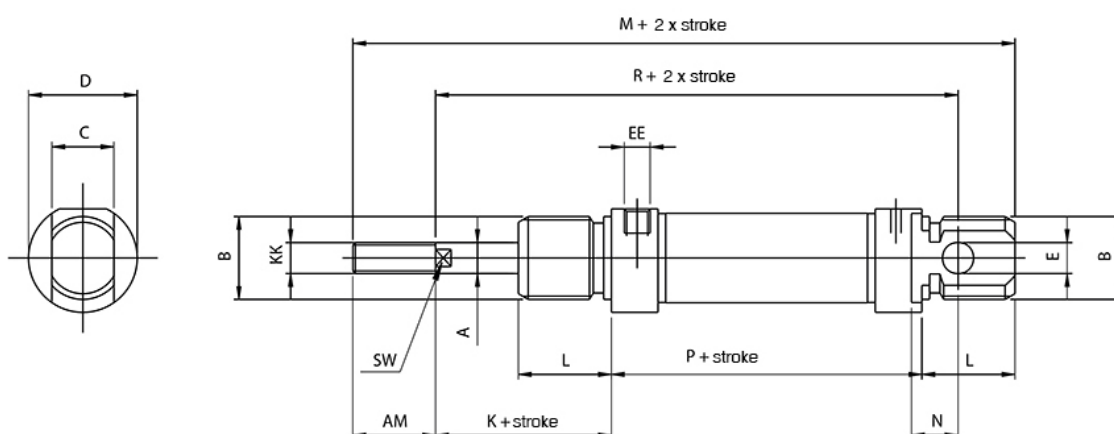

Type number	Ø [mm]	A	B	C	D	E	K	L	M	N	P	R	AM	EE	KK	SW
REMV 16/...	Ø 16	6	M 16 x 1,5	12	19	6	22	18	134,5	9	78,5	107,5	16	M 5	M 6	5
REMV 20/...	Ø 20	8	M 22 x 1,5	16	27	8	24	20	154	12	90	118	20	G 1/8"	M 8	7
REMV 25/...	Ø 25	10	M 22 x 1,5	16	30	8	28	22	166	12	94	130	22	G 1/8"	M 10 x 1,25	9