


RIM 25/25

HAFNER


(HU) ISO 6432 körprofil henger

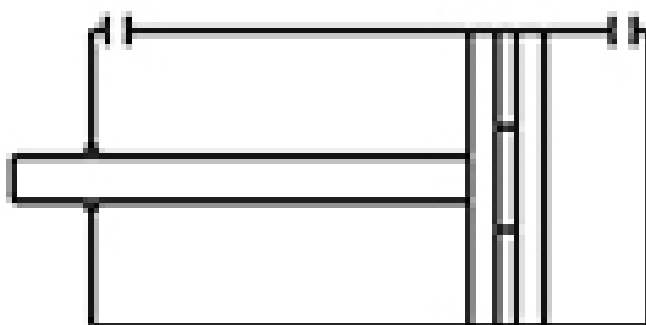

Technical data


Port size / Connection	G 1/8"
Piston rod thread	M10 x 1,25 - male thread
ISO standard	ISO 6432
Medium	Compressed air
Traction force	235 N
Piston type	Magnetic
Material seals	Polyurethane, NBR
Material heads	Anodized aluminum
Diameter	Ø25
Function	Double acting
Temperature range	-20°C...+80°C
Material body	Stainless steel
Material piston	Brass
Material guide bushing	Sintered bronze
Piston rod diameter	Ø10 mm
Stroke	25 mm
Operating pressure	1...10 bar
Thrust force	280 N
Cushioning	Built-in cushioning rings
Material piston rod	Stainless steel (AISI 304)

RIM 25/25



HAFNER

(HU) ISO 6432 körprofil henger

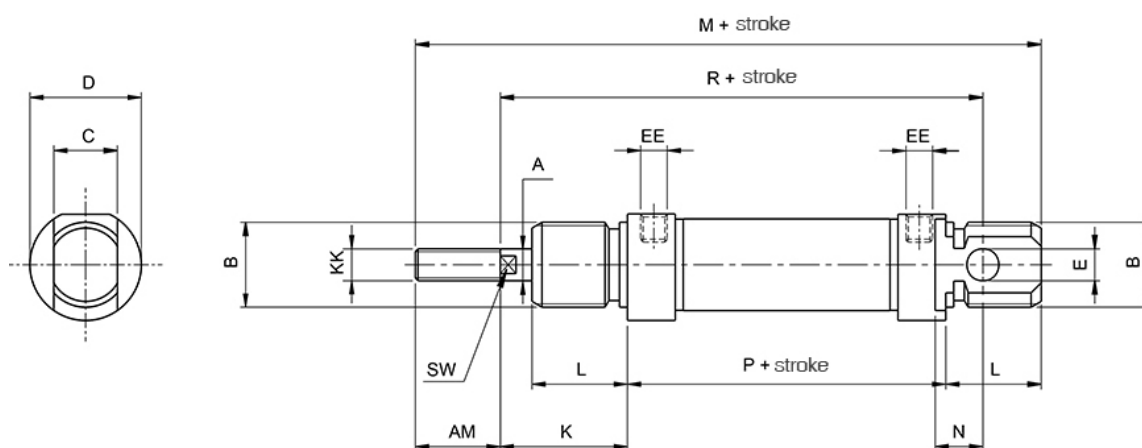

Type number	Ø [mm]	A	B	C	D	E	K	L	M	N	P	R	AM	EE	KK	SW
RIM 8/...	Ø 8	4	M 12 x 1,25	8	16	4	16	12	86	6	46	64	12	M 5	M 4	-
RIM 10/...	Ø 10	4	M 12 x 1,25	8	16	4	16	12	86	6	46	64	12	M 5	M 4	-
RIM 12/...	Ø 12	6	M 16 x 1,5	12	19	6	22	18	104	9	48	75	16	M 5	M 6	5
RIM 16/...	Ø 16	6	M 16 x 1,5	12	19	6	22	18	109	9	53	82	16	M 5	M 6	5
RIM 20/...	Ø 20	8	M 22 x 1,5	16	27	8	24	20	131	12	67	95	20	G 1/8"	M 8	7
RIM 25/...	Ø 25	10	M 22 x 1,5	16	30	8	28	22	140	12	68	104	22	G 1/8"	M 10 x 1,25	9