


QIF 32/80

HAFNER


(HU) UNITOP kompakt henger

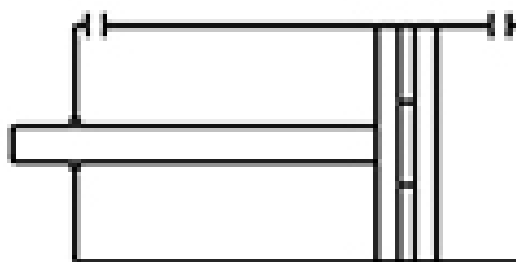

Technical data


Port size / Connection	G 1/8"
Piston rod thread	M10 x 1,25 - male thread
Medium	Compressed air
Traction force	394 N
Piston type	Magnetic
Material seals	Polyurethane, NBR
Material heads	Anodized aluminum
Diameter	Ø32
Function	Double acting
Temperature range	-20°C...+80°C
Material body	Anodized aluminum
Material piston	Aluminum
Material guide bushing	Sintered bronze
Piston rod diameter	Ø12 mm
Stroke	80 mm
Operating pressure	1...10 bar
Thrust force	458 N
Cushioning	Built-in cushioning rings
Material piston rod	Chromed steel (CK45)

QIF 32/80



HAFNER

(HU) UNITOP kompakt henger

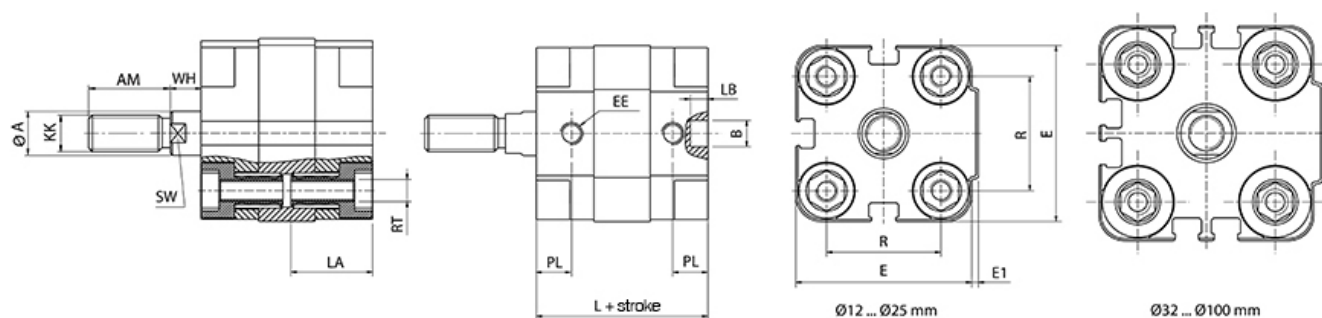

Type number	Ø [mm]	A	B	E	E1	L	R	T	AM	EE	KK	LA	LB	PL	RT	SW	WH
QIF 12/...	Ø 12	6	6	29	1	35	18	1,5	16	M 5	M 6	16	4	6,5	M 4	5	7,5
QIF 16/...	Ø 16	8	6	29	1	35	18	2	20	M 5	M 8	16	4	6,5	M 4	7	8,5
QIF 20/...	Ø 20	10	6	36	1,5	39	22	2	22	M 5	M 10 x 1,25	18,5	4	8	M 5	9	7
QIF 25/...	Ø 25	10	6	40	1,5	39	26	2	22	M 5	M 10 x 1,25	18,5	4	8	M 5	9	7
QIF 32/...	Ø 32	12	6	50	2	42	32	2,8	22	G 1/8"	M 10 x 1,25	21,5	4	6,5	M 6	10	7
QIF 40/...	Ø 40	12	6	60	2,5	45,5	42	2,8	22	G 1/8"	M 10 x 1,25	21,5	4	7,5	M 6	10	8,5
QIF 50/...	Ø 50	16	6	68	3	45,5	50	3,5	24	G 1/8"	M 12 x 1,25	23,5	4	7,5	M 8	13	10
QIF 63/...	Ø 63	16	8	87	4	51	62	3,5	24	G 1/8"	M 12 x 1,25	28,5	4	7,5	M 10	13	10,5
QIF 80/...	Ø 80	20	8	107	4	62	82	4,5	32	G 1/8"	M 16 x 1,5	28,5	4	9,5	M 10	17	13
QIF 100/...	Ø 100	25	8	128	5	68	103	6	40	G 1/4"	M 20 x 1,5	28,5	4	10,5	M 10	22	15,5