
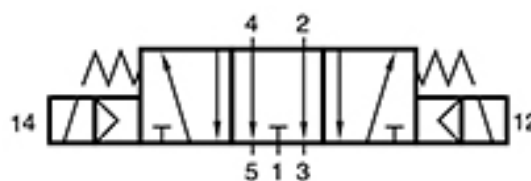


MH 532 304 TT

HAFNER


(HU) 5/3-as elekt. vez. alaplapos szelep, középáll. leszell. - DN3 - hidegálló

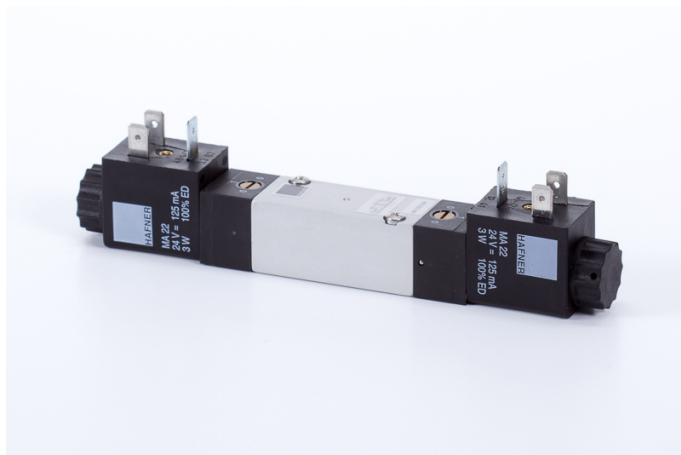

Technical data

Port size / Connection	For manifolds
Medium	Compressed air
Function	3-position, centre exhausted
Temperature range	-50...+50°C
Port orientation	On the bottom for manifold assembly
Operating pressure	3...10 bar
Air flow rate (P1=6 bar, ΔP=1 bar)	220 l/min
Orifice size	DN 3
Mounting type	Valve for manifold / valve terminal mounting
Power consumption	3 W / 5 VA
Ways	5/3-ways
Material body	Aluminum
Switching time	50 ms 6 bar, +20°C
Actuation	Electrically actuated

MH 532 304 TT

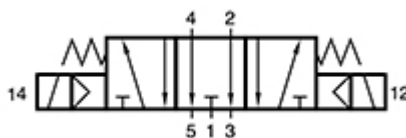

HAFNER

(HU) 5/3-as elekt. vez. alaplapos szelep, középáll. leszell. - DN3 - hidegálló

