

A-55960-6-1/4

HAFNER

(HU) Fojtószelep, menetes-dugaszolható csatlakozóval



Technical data


Kivitel	menetes
Port size / Connection	G 1/4"
Medium	Compressed air
Material seals	NBR
Temperature range	-20°C...+80°C
Operating pressure	1...10 bar
Air flow rate (P1=6 bar, ΔP=1 bar)	max. 410 l/min
Material retaining ring	Nickel-plated brass
Rögzítő gyűrű anyaga	Nickel-plated brass
Material support ring	Technopolymer
O-gyűrű anyaga	NBR
Pressure range	1...10 bar
Port size Push-in connection	Ø6
Material body	Technopolymer
Material release ring	Technopolymer
Rögzítő karom anyaga	Stainless steel
Csatlakozó hüvely anyaga	Nickel-plated brass

A-55960-6-1/4



HAFNER

(HU) Fojtószelep, menetes-dugaszolható csatlakozóval

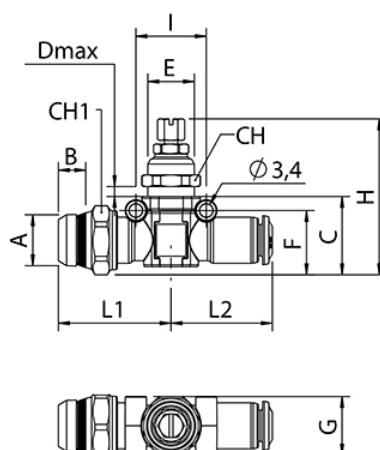

Type number	Tube size	Port size A	B	C	D	E	F	G	H	I	L1	L2	CH	CH1
A-55960-4-1/8	4	G 1/8"	5,5	20	6	M 12 x 1	16,5	15	39,5...45,5	18	28,5	26	14	16
A-55960-6-1/8	6	G 1/8"	5,5	20	6	M 12 x 1	16,5	15	39,5...45,5	18	28,5	26	14	16
A-55960-6-1/4	6	G 1/4"	7	20	6	M 12 x 1	16,5	15	39,5...45,5	18	28,5	26	14	16
A-55960-8-1/4	8	G 1/4"	7	23	6,5	M 14 x 1	16,5	17	42,5...48,5	20	33,5	29	16	20
A-55960-8-3/8	8	G 3/8"	7,5	23	6,5	M 14 x 1	16,5	17	42,5...48,5	20	33,5	29	16	20
A-55960-10-3/8	10	G 3/8"	7,5	24,5	8	M 16 x 1	20,5	19	42,5...54	22,5	34,5	33,5	18	20
A-55960-10-1/2	10	G 1/2"	9	25	8	M 16 x 1	21	19	42,5...54,5	22,5	34,5	33,5	18	21